ST1 – 230 x 300
6–16 '
8 ' @ 150 c/c

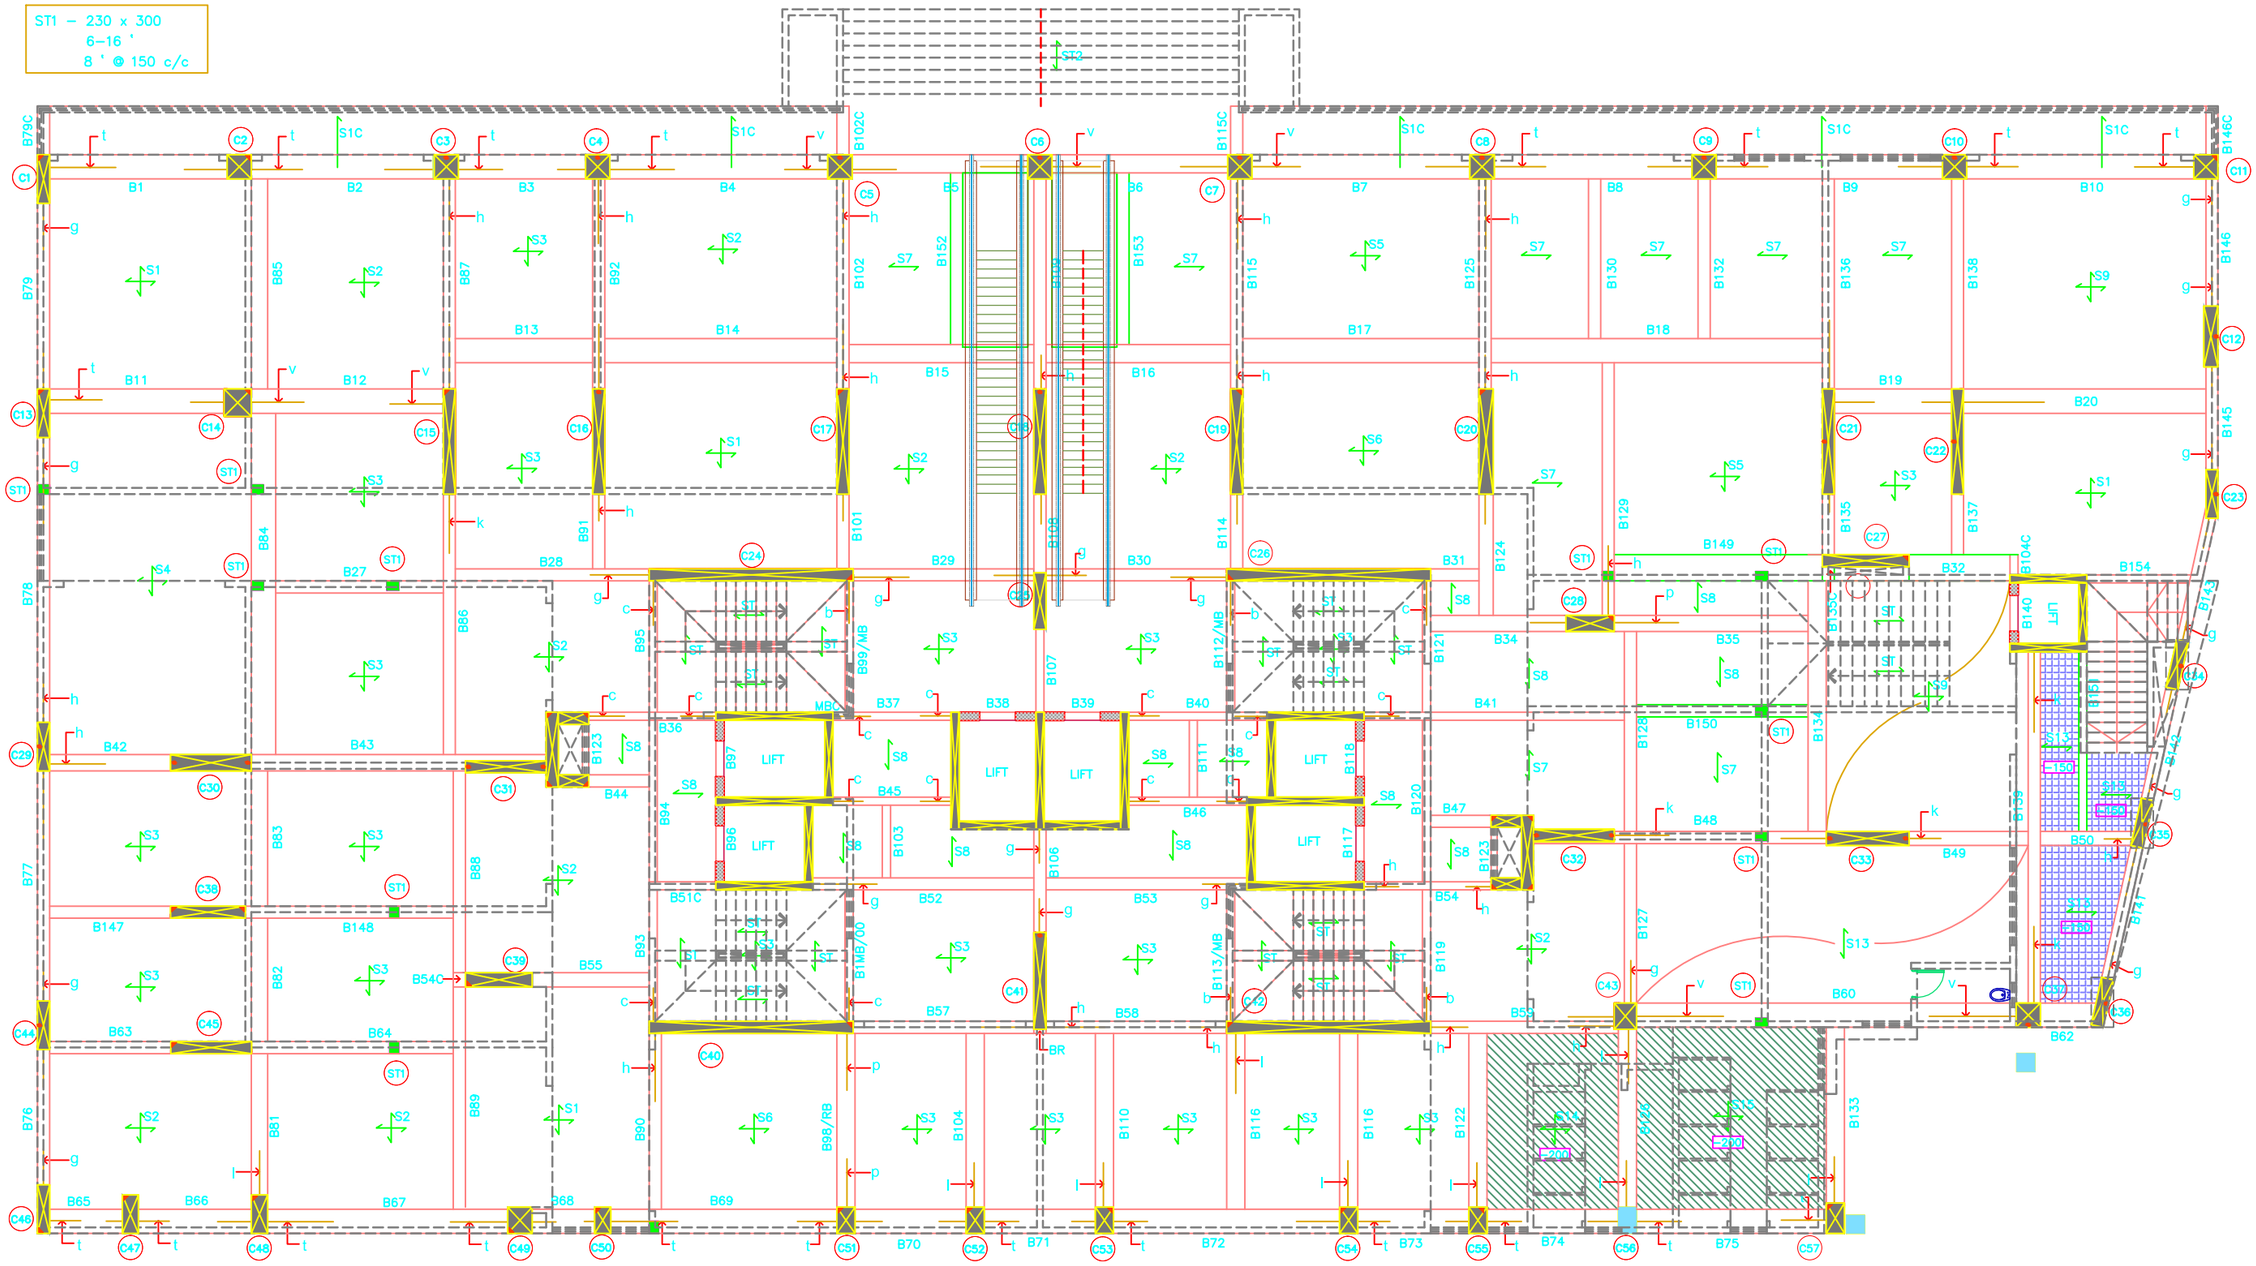

LAYOUT OF SECOND SLAB & BEAM
UPPER GROUND FLOOR BOTTOM

*CONCRETE GRADE *

1) FOOTING & RAFT -	M35
2) COLUMN & LIFT PARDI -	M40
3) SLAB & BEAM - INCLUDING COLUMN CAP	M35
4) PLINTH & TIE BEAM -	M35
5) RETAINING WALL -	M35

EXTRA TOP BAR

BAR DIA	L/4 OR LD WHICHEVER IS GREATER AT BOTHSIDE FROM CENTRE OF SUPPORT			
a = 2–12 '	f = 3–12 '	k = 4–12 '	L/4 OR LD=750
b = 2–16 '	g = 3–16 '	l = 4–16 '	L/4 OR LD=1000
c = 2–20 '	h = 3–20 '	m =4–20 '	L/4 OR LD=1200
d = 2–25 '	i = 3–25 '	n = 4–25 '	L/4 OR LD=1500
e = 2–32 '	j = 3–32 '	o = 4–32 '	L/4 OR LD=2000
	v = 6–20 '	p = 5–20 '	L/4 OR LD=1200
	t = 6–16 '	s = 5–16 '	L/4 OR LD=1000

REVISION

R.NO.	DESCRIPTION	DATE
R0	ORIGINAL DRAWING	31.01.2025

REFERENCE IS CODES

1. IS 456–2000 – PLAIN AND REINFORCED CONCRETE.
2. IS 800 – STEEL STRUCTURE.
3. IS 3370 – LIQUID RETAINING STRUCTURE.
4. IS 2911 – PILE FOUNDATION.
5. IS 1893–2016– EARTHQUAKE RESISTANT DESIGN OF STRUCTURE.

9) CLEAR COVER TO RENFORCEMENT
- a) FOOTING
  - i) TOP & BOTTOM = 50m.m.
  - ii) SIDE = 50m.m.
- b) COLUMN = 40m.m.
- i) SHEAR WALL LESS THAN 200 = 25m.m.
- ii) SHEAR WALL/COLUMN FOR 200 = 25m.m.
- iii) SHEAR WALL GREATER THAN 200 = 40m.m.
- c) SLAB = 20m.m.
- d) BEAM = 25m.m.
- e) RETAINING WALLS = 25m.m.
- f) WATER TANK WALLS = 25m.m.
- g) LIFT PARDI = 25m.m.

10) WE WILL NOT BE RESPONSIBLE FOR ANY LEGAL OR APPROVAL REGRADING THE APPROVED ARCHITECTURAL PLAN.

NOTES :

1) DO NOT SCALE THE DRAWING, REFER FIGURED DIMENSIONS
2) ANY DESCRIPANCIES OR OMISSION OR CHANGES SHALL BE BROUGHT TO NOTICE PRIOR TO EXECUTION
3) DO NOT CAST ANY R.C.C WORK UNLESS IT IS CHECKED AND CONFIRMED BY SITE ENGINEER.
4) ALL STEEL IS TOR STEEL OF GRADE Fe 500 N/mmSq.
5) S.B.C. OF SOIL ASSUMED IS 100 T/Sq M.
6) COLUMNS AND FOOTINGS ARE DESIGNED FOR B. P.+ L. P. + U. G. + 22 FLOORS.
7) DESIGN OF CENTRING, SHUTTERING, AND CONCRETE MIX IS CONTRACTOR / CLIENTS / SITE RESPONSIBLITY.
8) LAPPING OR ANCHORAGE LENGTH
   FOR a) BEAM AND SLAB = 60 x DIA OF BAR
   b) COLUMN = 50 x DIA OF BAR

PROJECT	PROPOSED RESIDENTIAL/COMMERCIA LBUILDING AT, 400/401, NANA PETH, PUNE. FOR– AJAY BHOSALE.
ARCHITECT	V.K ARCH. PUNE.
TITLE	LAYOUT OF SECOND SLAB & BEAM

JOB NO.	DRG. NO.	DATE OF ISSUE	DRN.	DESIGN
4968/19	STR–3–R0 SHEET NO 1	31.01.2025	GAJANAN	ANIL

Sunil Mutalik & Associates
STRUCTURAL CONSULTANTS
1349/1350 SHUKRAWAR PETH,
ARTHSHILPA, THIRD FLOOR,
ABOVE HOTEL GANARAJ,
BAJIRAO ROAD, PUNE 2
PHONE– 24476705, FAX–, 2448872 EMAIL–, sunil.mutalik@gmail.com

THIS DRG & THE CONNECTED DESIGN IS OUR SOLE PROPERTY & COPYRIGHT IT IS LOANED ON CONDITION OF RETURN ON DEMAND IT SHALL NOT BE COPIED LENT OR USED WITHOUT OUR PRIOR WRITTEN CONSENT

CAD FILE NAME– GAJANAN
D–/
–