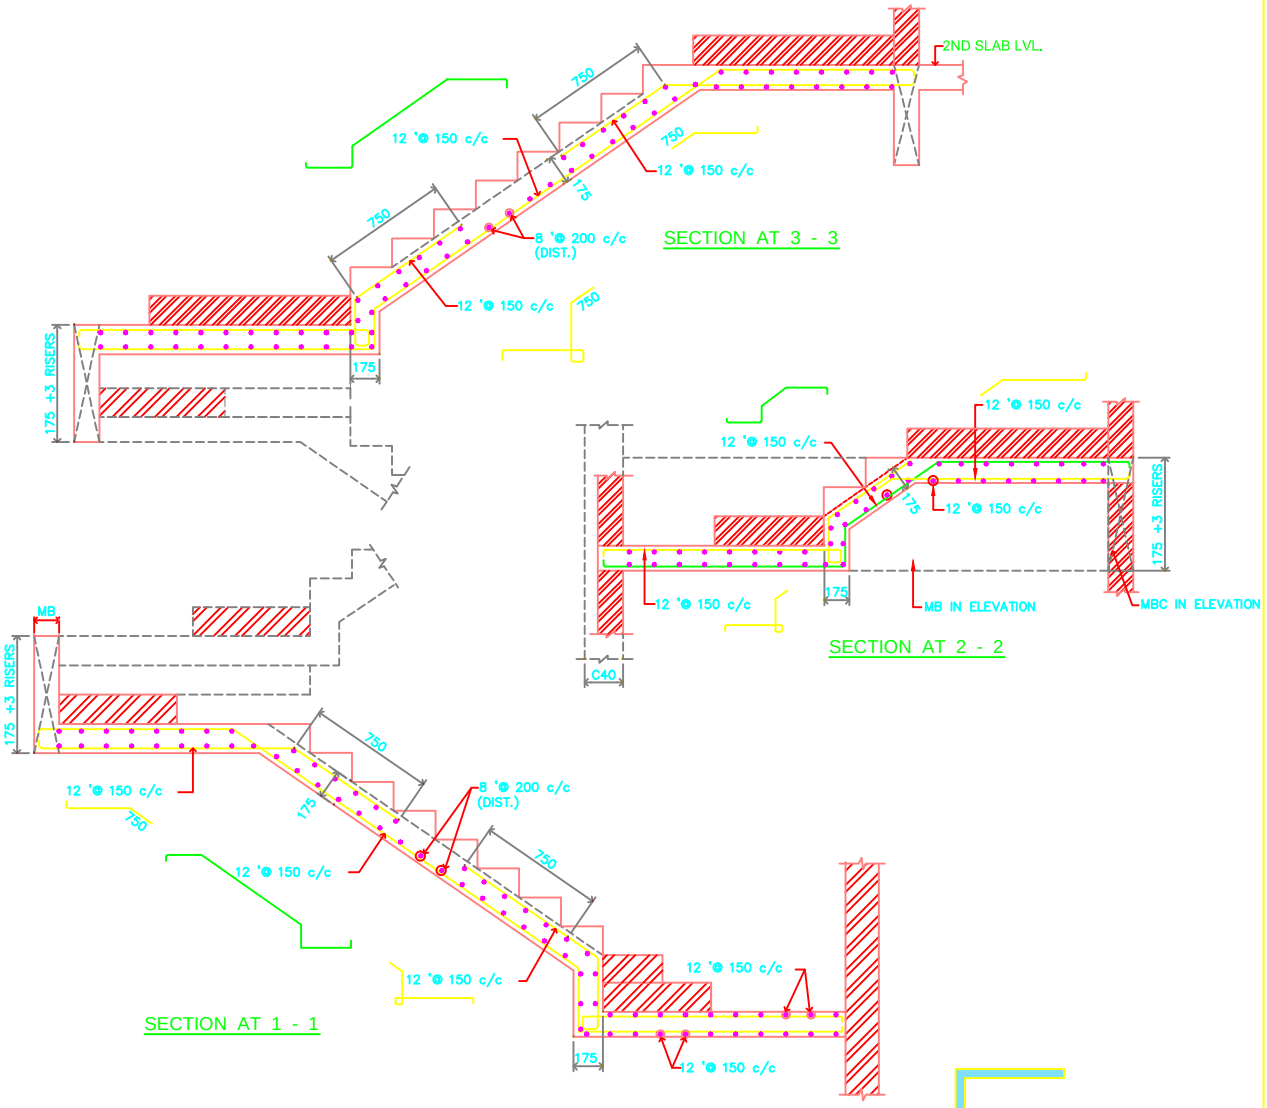

REVISION		
R.NO.	DESCRIPTION	DATE
R0	ORIGINAL DRAWING	09.01.2020

REFERENCE IS CODES

1. IS 456-2000 – PLAIN AND REINFORCED CONCRETE.
2. IS 800 – STEEL STRUCTURE.
3. IS 3370 – LIQUID RETAINING STRUCTURE.
4. IS 2911 – PILE FOUNDATION.
5. IS 1893-2016– EARTHQUAKE RESISTANT DESIGN OF STRUCTURE.

9) CLEAR COVER TO REINFORCEMENT

a) FOOTING	
I) TOP & BOTTOM	= 50m.m.
II) SIDE	= 50m.m.
b) COLUMN	= 40m.m.
I) SHEAR WALL LESS THAN 200	= 25m.m.
II) SHEAR WALL/COLUMN FOR 200	= 25m.m.
III) SHEAR WALL GREATER THAN 200	= 40m.m.
c) SLAB	= 20m.m.
d) BEAM	= 25m.m.
e) RETAINING WALLS	= 25m.m.
f) WATER TANK WALLS	= 25m.m.
g) LIFT PARDI	= 25m.m.

10) WE WILL NOT BE RESPONSIBLE FOR ANY LEGAL OR APPROVAL REGRADING THE APPROVED ARCHITECTURAL PLAN.

NOTES :-

1) DO NOT SCALE THE DRAWING, REFER FIGURED DIMENSIONS
2) ANY DESCRIPANCIES OR OMISSION OR CHANGES SHALL BE BROUGHT TO NOTICE PRIOR TO EXECUTION
3) DO NOT CAST ANY R.C.C WORK UNLESS IT IS CHECKED AND CONFIRMED BY SITE ENGINEER.
4) ALL STEEL IS TOR STEEL OF GRADE Fe 500 N/mmSq.
5) S.B.C. OF SOIL ASSUMED IS 100 T/Sq M.
6) COLUMNS AND FOOTINGS ARE DESIGNED FOR B. P.+ L. P. + U. G. + 22 FLOORS.
7) DESIGN OF CENTRING, SHUTTERING, AND CONCRETE MIX IS CONTRACTOR / CLIENTS / SITE RESPONSIBLITY.
8) LAPPING OR ANCHORAGE LENGTH FOR a) BEAM AND SLAB = 60 x DIA OF BAR
b) COLUMN = 50 x DIA OF BAR

PROJECT	PROPOSED RESIDENTIAL/COMMERCIA LBUILDING AT, 400/401, NANA PETH, PUNE. FOR– AJAY BHOSALE.			
ARCHITECT	V.K ARCH. PUNE.			
TITLE	LAYOUT OF STAIRCASE (FROM 1ST SLAB TO 2ND SLAB.)			
JOB NO.	DRG. NO.	DATE OF ISSUE	DRN.	DESIGN
4068/19	STR-1-40 SHEET NO 2/2	11.02.2020	GAJANAN	AML

Sunil Mutalik & Associates
STRUCTURAL CONSULTANTS
1348/1350 SHUKRAWAR PETH,
ARTHSHILPA, THIRD FLOOR,
ABOVE HOTEL SAMRAT,
BAJIRAO ROAD, PUNE 2.
PHONE:- 24476705, FAX:- 24497715
EMAIL:- sunil.mutalik@gmail.com
CAD FILE NAME:- GAJANAN
THIS DRG IS THE EXCLUSIVE DESIGN IN OUR SOLE PROPERTY & COPYRIGHT OF IS LOANED ON CONDITION OF RETURN ON DEMAND IT SHALL NOT BE COPIED LENT OR USED WITHOUT OUR PRIOR WRITTEN CONSENT